

MACHINE ACCESSORIES

MODEL/ISC

Incline Screw Conveying System

Even the most accurate of fillers can only operate with a reliable, regulated, consistent supply of product to the hopper. All-Fill complements its auger filling machines with a complete line of efficient, reliable delivery systems for free-flowing powders, non-flowing products, and bulk solids. All-Fill offers both horizontal and inclined screwfeeder equipment for the bulk supply of product to your filling equipment. Model ISC can be used to refill filling machine hoppers and can also be useful in transferring product from different height levels.

It consists of a high capacity (6 cu. ft.) hopper with hinged, removable cover, inclined trough assembly, and a 5.5" diameter, by 10' and 12' long ground and polished stainless steel conveyor screw. Rugged screw drive motor and gear reducer mounted at base provides continuous, high torque operation with even the most difficult products. Hopper agitation and vibration controlled by separate motors. All controls and motor starters mounted

at rear for easy access. Built for maximum efficiency, safety, and ease of maintenance, our horizontal screw conveyors and inclined screw feeders are available in a variety of configurations, with options and accessories to help solve your most difficult product feeding challenges. Sealed hopper cover reduces contamination from external environment. Removable top screw end bearing plate permit entire unit to be quickly disassembled for thorough cleanup or sanitizing. Flexible discharge port allows direct connection to infeed duct of filling machine without spillage or waste.




SPECIFICATION SUMMARY:

Construction:	Stainless Steel Frame – Welded and polished type-304 stainless steel product contact parts, Mounting frame with adjustable feet and removable hopper cover
Sizes:	5.5" dia. X 10' long ground and polished stainless steel screw with matching, pivoting housing, Adjustable discharge height, standard 74"
Features:	Includes ¼ hp, 1400 rpm drive and controls, 6 cu. ft. hopper with hinged cover, safety limit switches on hopper covers, delivery speeds up to 150 cu. ft per hour, variable length (10'–12'), 5" inch pitch, 5.5" diameter, stainless steel conveyor screw. Hopper Agitation, Separate motor-controlled agitator blade to regulate product into flights of conveyor screw.
Machine Dimensions:	113" wide X 92" high
Controls:	Forward/Reverse switch, Vibration & Agitation selector switches. Power Indicator, Emergency Stop, Reset switch, Screwfeeder Jog-Run-Off selector,
Electrical Requirements:	208/230/460v, 3-phase, 60 HZ.
Construction:	Stainless steel contact parts
Options:	Level control available, provides on/off actuation in response to product level in filler hopper, Variable Speed Screw Drive – To vary product supply rate, safety interlocks – limit switches cut power when hopper opened

MACHINE DIMENSIONS:

*Dimensions are approximate
and subject to change.
Please confirm sizes with
your sales representative
prior to purchase.*

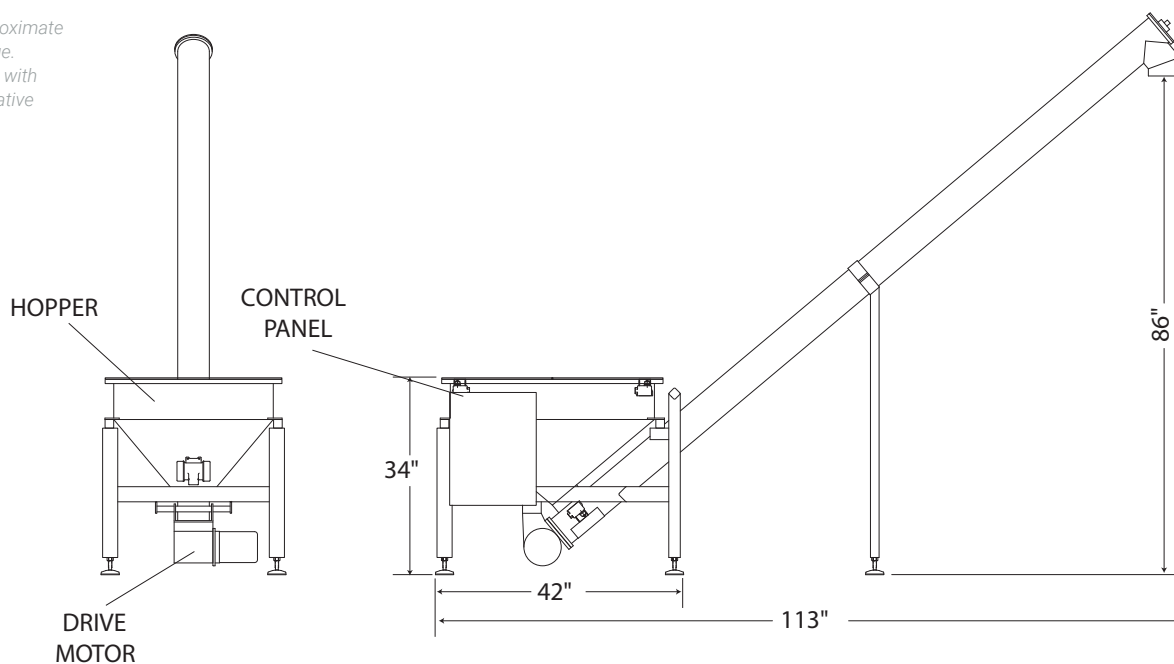


ADDITIONAL MODEL DETAILS:



PERFECT COMPLEMENT:

When used with any of All-Fill fillers, the Model ISC makes an integrated package for continuous, high accuracy/high cycle rate production filling.



COMPLETE & READY FOR USE:

Motor starters prewired for simplified electrical connections. Control panel includes power on/off switch, screwfeeder forward/reverse control, vibration/agitation selector switches, and ready pilot light.

WORLD-CLASS SERVICE & PARTS SUPPORT:

INCLINE SCREW FEEDERS ARE SUPPORTED BY DUPRE SOLUTIONS LOCATED IN VT(USA). ALL WARRANTIES SERVICE/PARTS ETC. ARE TO BE HANDLED THROUGH DUPRE SOLUTIONS, UNLESS NOTED OTHERWISE SCREW FEEDER WILL SHIP FROM VERMONT.

www.AllFill.com • 610 524 7350 • 418 Creamery Way, Exton, PA • info@AllFill.com